



**GM LED AYDINLATMA İTHALAT İHRACAT
SAN. VE DİŐ TİC. LTD. ŐTİ.**

+90 546 256 30 60
fatih@gmled.com.tr
www.gmled.com.tr

Akçaburgaz Mah. Hadımköy Yolu Cad. No:186/1 34538
Esenyurt, İstanbul, Türkiye



*UNDER-SHELF LED LIGHTING AND
ELECTRO RAIL SYSTEMS*

*RAF ALTI LED AYDINLATMA VE
ELEKTRO RAY SİSTEMLERİ*

Steel and Wooden Shelves

Çelik ve Ahşap Raflar



Product Details



Sıva Altı Alüminyum Led Armatür

Aluminum

GM-6537




Grooving width 16MM depth 10MM

Slot Size: Length of Light Bar - 6MM

[B]

Product Information


Model Number	Volts	Power	Color Temperature	Length (MM)
GM-6537	12V/24V	3W	3000K/4000K/6000K	300
GM-6537	12V/24V	4W	3000K/4000K/6000K	400
GM-6537	12V/24V	6W	3000K/4000K/6000K	600
GM-6537	12V/24V	7W	3000K/4000K/6000K	700
GM-6537	12V/24V	8W	3000K/4000K/6000K	800
GM-6537	12V/24V	9W	3000K/4000K/6000K	900
GM-6537	12V/24V	11W	3000K/4000K/6000K	1100

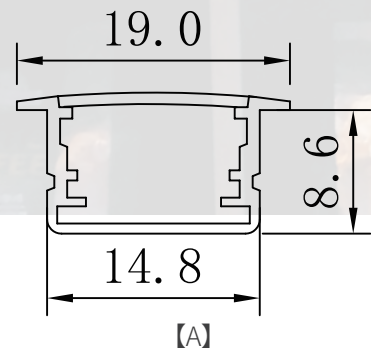


Smart Elektro Ray Soket

Smart Power Track Socket


GM-8605-CT

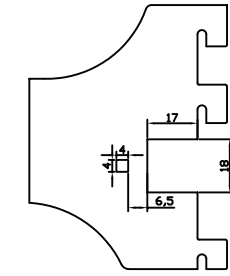


[Model A Çizimi]

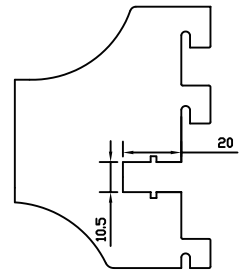

[Model B Çizimi]

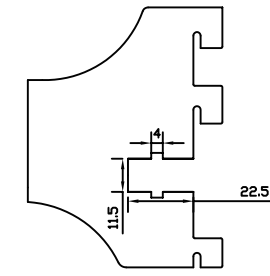

[Model C Çizimi]

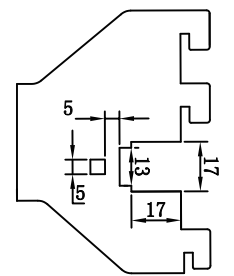

[Model D Çizimi]

Product Information

Model Number	Amps	Length (MM)
GM-8605-CT	3A	450

Smart Elektro Ray

Smart Power Track

GM-8605



Product Information

Model Number	Volts	Length (MM)	Color Temperature
GM-8605	12V/24V	1200	2525/3030/3050/3060/3070/3080
GM-8605	12V/24V	1400	2525/3030/3050/3060/3070/3080
GM-8605	12V/24V	1600	2525/3030/3050/3060/3070/3080
GM-8605	12V/24V	1800	2525/3030/3050/3060/3070/3080
GM-8605	12V/24V	2000	2525/3030/3050/3060/3070/3080
GM-8605	12V/24V	2400	2525/3030/3050/3060/3070/3080
GM-8605	12V/24V	2800	2525/3030/3050/3060/3070/3080

Bağlantı Aparatı



2525 3030 3050 3060 3070 3080


Metal Raf Aydınlatma Sistemleri



Mıknatıslı Sistem Elektro Ray Ultra İnce

Magnetic System Power Track

GM-8607

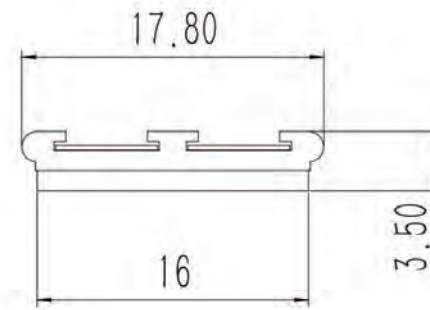


Product Information

Model Number	Amps	Length (MM)	Color
GM-8607	7A	1200	Black/White
GM-8607	7A	1400	Black/White
GM-8607	7A	1600	Black/White
GM-8607	7A	1800	Black/White
GM-8607	7A	2000	Black/White

Mıknatıslı Alüminyum Led Armatür

Aluminum Led Luminaire With Magnet

GM-6501

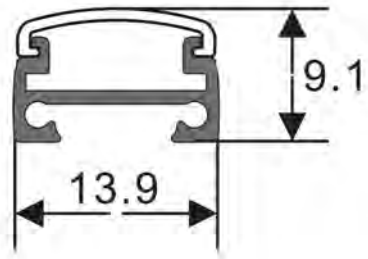

Product Information

Model Number	Volts	Power	Color Temperature	Length (MM)
GM-6501	12V/24V	4. 2W	3000K/4000K/6000K	420
GM-6501	12V/24V	5. 2W	3000K/4000K/6000K	520
GM-6501	12V/24V	7. 2W	3000K/4000K/6000K	720
GM-6501	12V/24V	8. 2W	3000K/4000K/6000K	820
GM-6501	12V/24V	9. 2W	3000K/4000K/6000K	920
GM-6501	12V/24V	10. 2W	3000K/4000K/6000K	1020
GM-6501	12V/24V	11. 2W	3000K/4000K/6000K	1120

Mıknatıslı Elektro Ray Soket

Magnetic Power Track Socket

GM-8607-CT



Product Information

Model Number	Amps	Length (MM)
GM-8607-CT	3A	500MM



Product Information

Model Number	Amps	Length (MM)
GM-8607-JT	7A	1000MM

Düşük Sıcaklıklı Mıknatıslı Led Armatür

Low temperature magnetic laminate lamp


GM-6541

Düşük Sıcaklık
37°C 700lm/m



Product Information

Model Number	Volts	Power	Color Temperature	Length (MM)
GM-6541	12V/24V	2.6W	3000K/4000K/6000K	420
GM-6541	12V/24V	3.2W	3000K/4000K/6000K	520
GM-6541	12V/24V	4.6W	3000K/4000K/6000K	720
GM-6541	12V/24V	5.2W	3000K/4000K/6000K	820
GM-6541	12V/24V	5.8W	3000K/4000K/6000K	920
GM-6541	12V/24V	6.5W	3000K/4000K/6000K	1020
GM-6541	12V/24V	7.2W	3000K/4000K/6000K	1120

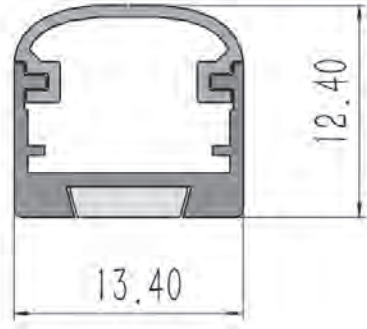

Lamba sıcaklığının ürünler üzerinde etkisi

Effect of lamp temperature on products



High temperature makes the plastic bag appear water droplets make food spoilage.

Yüksek sıcaklık plastik torbanın görünmesini sağlar su damlacıkları yiyeceklerin bozulmasına neden olur.



High temperature makes cosmetics melt and become inactive.

Yüksek sıcaklık kozmetiklerin erimesine ve aktif değil.

Düşük sıcaklık raf lambası şeması: ürün fotoelektrik parametreleri

Low temperature shelf lamp diagram: product photoelectric parameters

Sports Event	Parameters
Input Voltage	DC12V/DC24V
power (output)	6.5W/M
color temperature	3000K/4000K/5000K/6500K
photosynthetic efficiency	105lm/W
phanero-index	Ra > 85
Light source type	SMD2835
Number of light sources	120 beads/M 140 beads/M 160 beads/M
Lamp Material	6063 Aluminum Profile
Lampshade Color	white
Lampshade Material	PC
Connector Type	JST/SM /2PX

Düşük sıcaklık raf lambalarının enerji tasarrufu avantajları

Energy saving advantages of low temperature shelf lights

parameters	shelf lamp	General shelf light	comparison
Single power	6.5W	10.5W	-4W
1000 total power	6500W	10500W	-400W
Electricity consumption	65 degrees	105 degrees	-40 degrees
electricity bill	78\$	126\$	-48 \$
electricity consumption	1950 degrees	3150 degrees	-1200 degrees
electricity bill	2340\$	3780\$	-1440 \$
electricity consumption	23725 degrees	38325 degrees	-14600 degrees
electricity bill	28470\$	45990\$	-17520 \$

Calculation conditions / / Hesaplama koşulları:



- 1, lit 10 hours per day;
- 2, Calculated according to 1000 strips, each strip 1 meter
- 3, Electricity at 1.2 yuan per kilowatt-hour

- 1, günde 10 saat yanar;
- 2, 1000 şeride göre hesaplanmıştır, her şerit 1 metredir
- 3, Elektrik kilovatsaat başına 1,2 yuan

Siva Altı Alüminyum Led Armatür

Aluminum Under-Plaster Led Luminaire

GM-6503

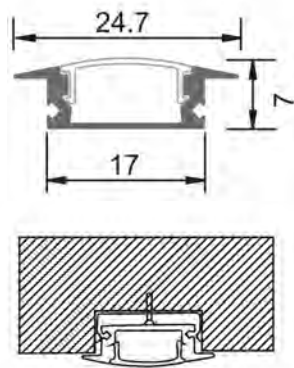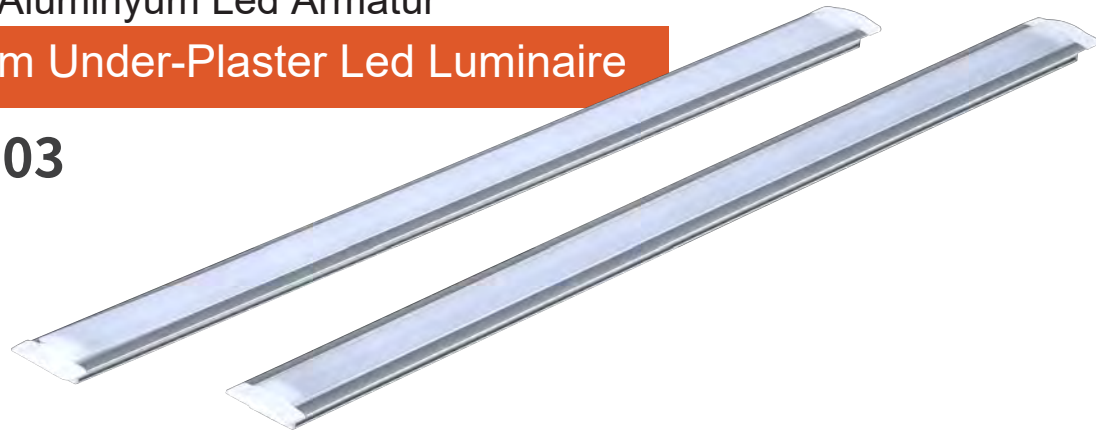


Product Information

Model Number	voltage	Power	color temperature	Length (MM)
GM-6503	12V/24V	5.2W	3000K/4000K/6000K	520
GM-6503	12V/24V	7.2W	3000K/4000K/6000K	720
GM-6503	12V/24V	8.2W	3000K/4000K/6000K	820
GM-6503	12V/24V	9.2W	3000K/4000K/6000K	920
GM-6503	12V/24V	11.2W	3000K/4000K/6000K	1120

Corner (L) Alüminyum Led Armatür

Corner Aluminum Led Luminaire

GM-6504A

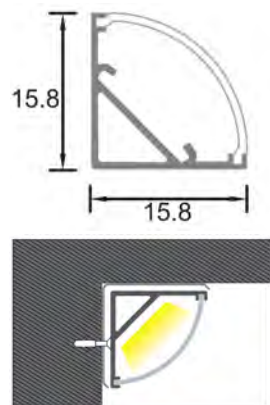

Product Information

Model Number	voltage	Power	color temperature	Length (MM)
GM-6504A	12V/24V	5.2W	3000K/4000K/6000K	520
GM-6504A	12V/24V	7.2W	3000K/4000K/6000K	720
GM-6504A	12V/24V	8.2W	3000K/4000K/6000K	820
GM-6504A	12V/24V	9.2W	3000K/4000K/6000K	920
GM-6504A	12V/24V	11.2W	3000K/4000K/6000K	1120

Slim Elektro Ray

Slim Power Track

GM-8604A



Product Information

Model Number	Amps	Length (MM)	color
GM-8604A	8A	1000	Black/White
GM-8604A	8A	1200	Black/White
GM-8604A	8A	1500	Black/White
GM-8604A	8A	1800	Black/White
GM-8604A	8A	2000	Black/White

Slim Elektro Ray Soket


Slim Power Track Socket

GM-8604A-XKCT



Product Information

Model Number	Amps	Length (MM)
GM-8604A-XKCT	3A	500MM

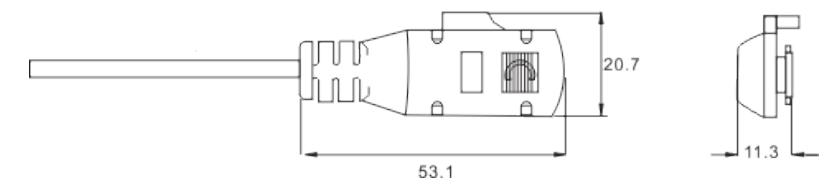

S/A Monofaze Elektro Ray


Single-Phase Power Track Under Plaster



GM-8601


Product Information

Model	Input Voltage	MM	Color
GM -8601	DC12/24V	1000	Black/White/Gray
GM -8601	DC12/24V	1200	Black/White/Gray
GM -8601	DC12/24V	1500	Black/White/Gray
GM -8601	DC12/24V	1800	Black/White/Gray
GM -8601	DC12/24V	2000	Black/White/Gray

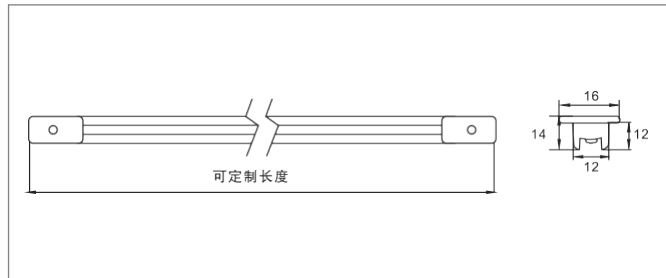

Elektro Ray Soket

Power Track Socket

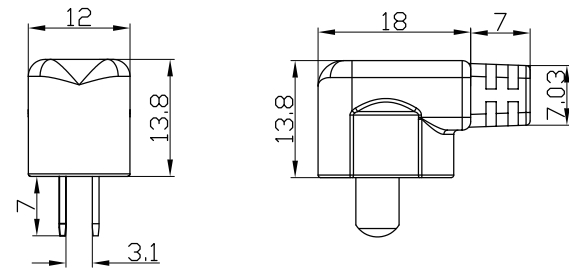


Product Information

Model	Voltage	Length (MM)
GM-8601-QZCT	12/24V	150MM
GM-8601-QZCT	12/24V	350MM
GM-8601-QZCT	12/24V	500MM

Monofaze Elektro Ray


Power Track

GM-8603

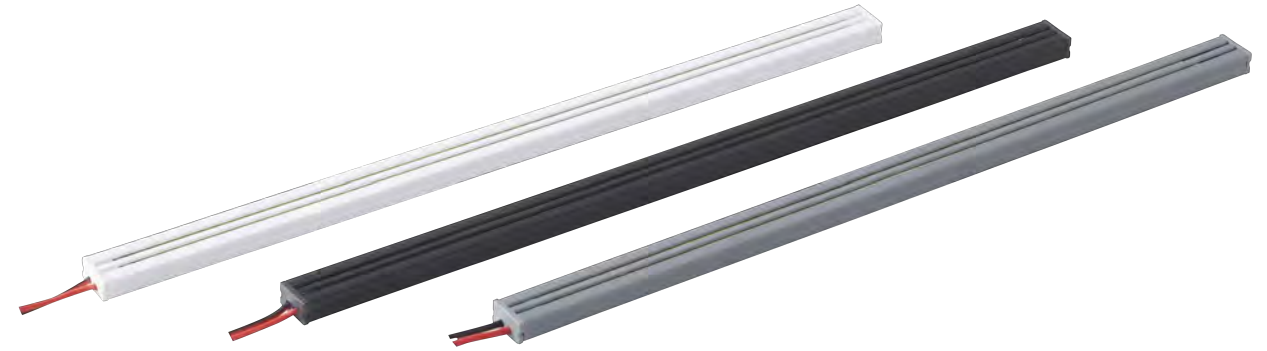


Product Information

Model	Input Voltage	MM	Color
GM -8603	DC12/24V	1000	Black/White/Gray
GM -8603	DC12/24V	1200	Black/White/Gray
GM -8603	DC12/24V	1500	Black/White/Gray
GM -8603	DC12/24V	1800	Black/White/Gray
GM -8603	DC12/24V	2000	Black/White/Gray

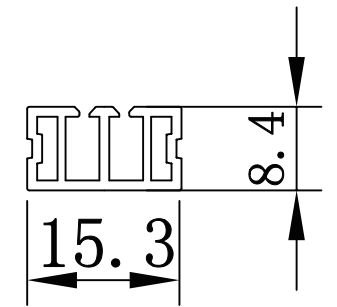

Dik Soket

Upright Socket

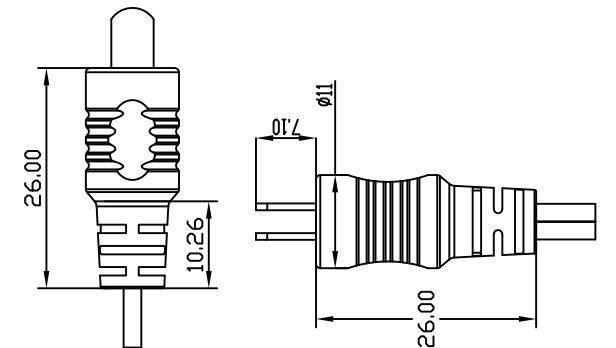

Product Information

Model	Voltage	Length (MM)
GM-8603-YXCT	12/24V	150MM
GM-8603-YXCT	12/24V	350MM
GM-8603-YXCT	12/24V	500MM

Alüminyum Dikme Elektro Ray




Aluminum Strut Electro Rail

GM-8608

Product rendering
Ürün işleme



Product size drawing:
Ürün boyutu çizimi:

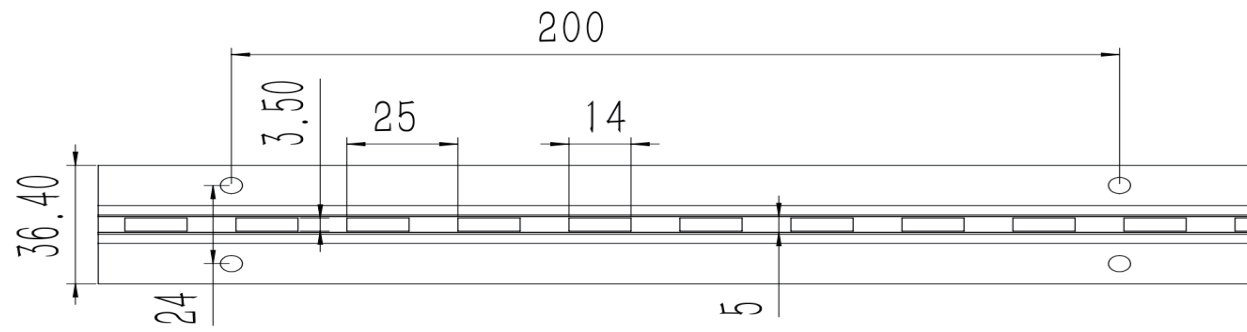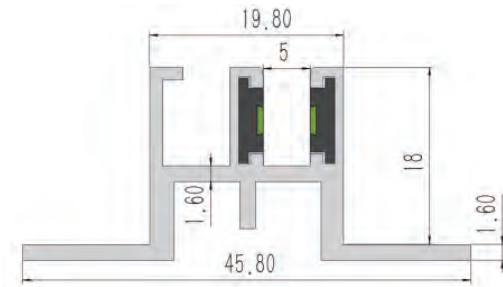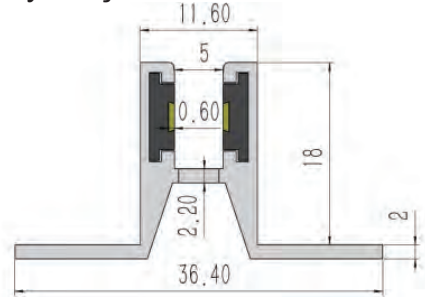

Alüminyum Dikme Elektro Ray Soket


Aluminum Strut Electro Rail Socket

GM-8608

Product rendering
Ürün işleme



CAD size drawing:
CAD boyut çizimi:

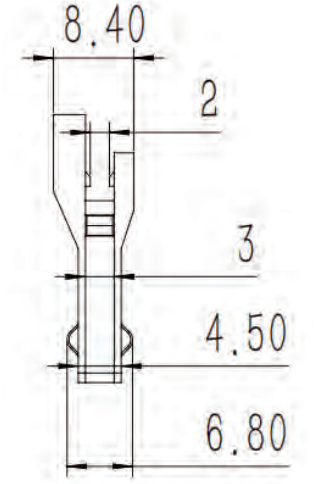


Braket açıklığı

Bracket opening

Product rendering
Ürün işleme



CAD size drawing:
CAD boyut çizimi:

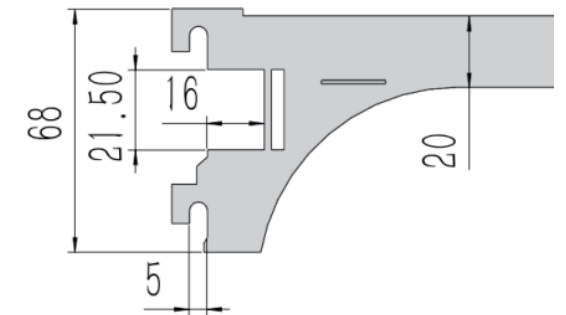


Şerit Led

Led Strip



12V 3LED'de kesilir

24V 6LED'de kesilir

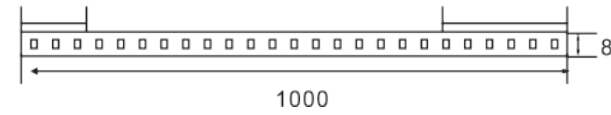

Product Information

Model	Voltage	W	Light Source Type	Number of Lights	Size	Light Angle
GM-2835	DC12/24V	10 W	2835	120	5MM	120
GM-2835	DC12/24V	10W	2835	120	8MM	120
GM-2835	DC12/24V	15W	2835	180	10MM	120

Ürün aksesuarları

Product accessories

Mıknatıslı Kablo Tutucu

Konnektör

magnet box	connectors
	<p>2PX</p> <p>JST</p>
<p>Note: Bundle Not: Tel paketi</p>	<p>Note: Joint type can be customized, wire default wire diameter AWG22#, wire length default wire 100mm Not: Bağlantı tipi özelleştirilebilir, tel varsayılan tel çapı AWG22#, tel uzunluğu varsayılan tel 100mm</p>

Güç Trafosu

Power Supply



Product Information

MODEL	V	W
GM-WZ-BYQ	12/24V	100W
GM-WZ-BYQ	12/24V	200W
GM-WZ-BYQ	12/24V	400W

IP67 Güç Trafosu


IP67 Power Supply



Product Information

MODEL	V	W
GM-FY-BYQ	12/24V	200W
GM-FY-BYQ	12/24V	400W

Alüminyum Led Armatür Profillerimiz Our Led Luminaire Aluminium Profiles

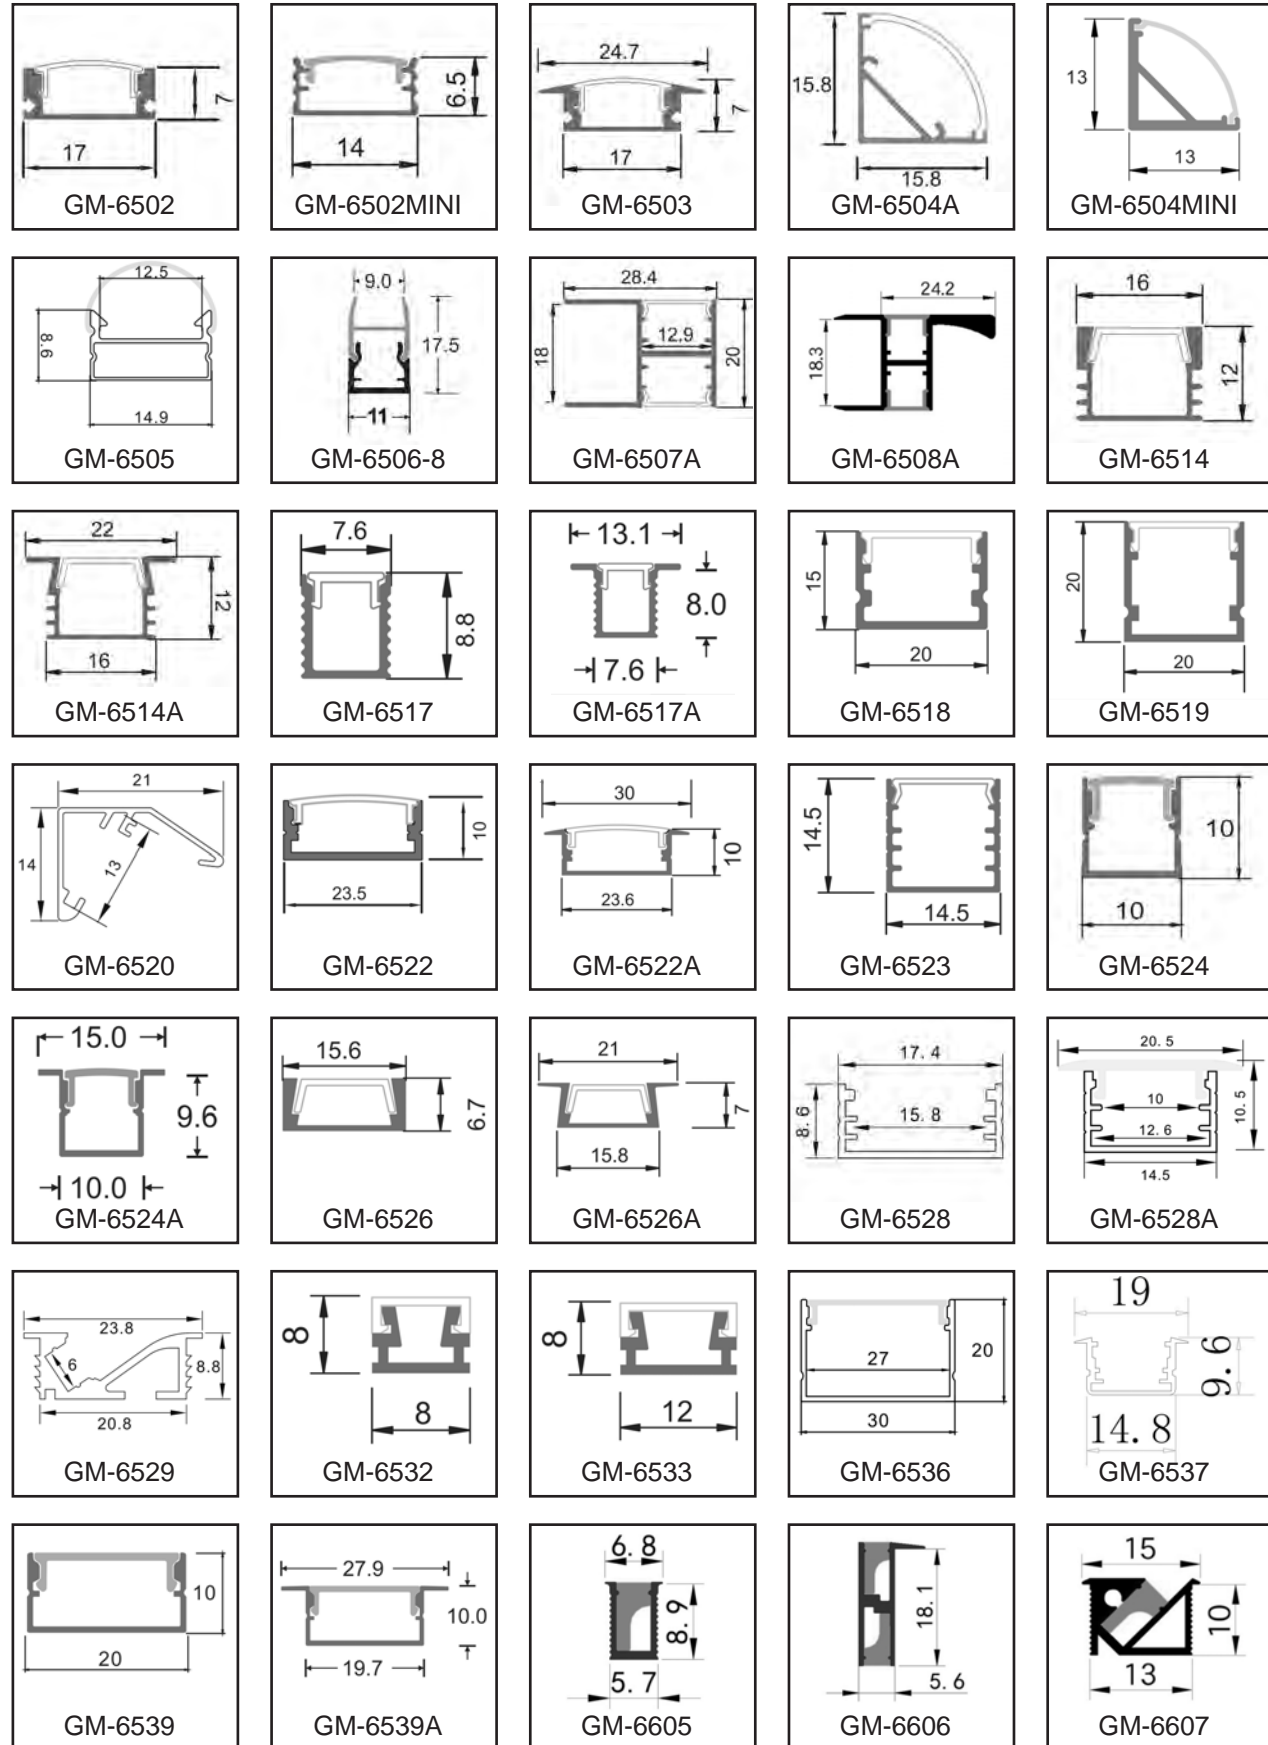

NEON LED

Silicone Light Strip GM-5101



Product Information

Model	voltage	power	Size (width*thickness) MM	Model	voltage	power	Size (width*thickness) MM
GM-5101	12V/24V	10W/M	1010	GM-5101	12V/24V	10W/M	2014
GM-5101	12V/24V	10W/M	1212	GM-5101	12V/24V	10W/M	2020
GM-5101	12V/24V	10W/M	1414	GM-5101	12V/24V	10W/M	2517
GM-5101	12V/24V	10W/M	1515	GM-5101	16V/24V	10W/M	3020
GM-5101	12V/24V	10W/M	1510	GM-5101	16V/24V	10W/M	3014
GM-5101	12V/24V	10W/M	1616	GM-5101	16V/24V	10W/M	3025
GM-5101	12V/24V	10W/M	1610	GM-5101	16V/24V	10W/M	4025
GM-5101	12V/24V	10W/M	2010	GM-5101	20V/24V	10W/M	5025

